


FOR POTATO AND VEGETABLE PROCESSING

(8)

Elevator E - Conveyor C

For general purpose product conveying

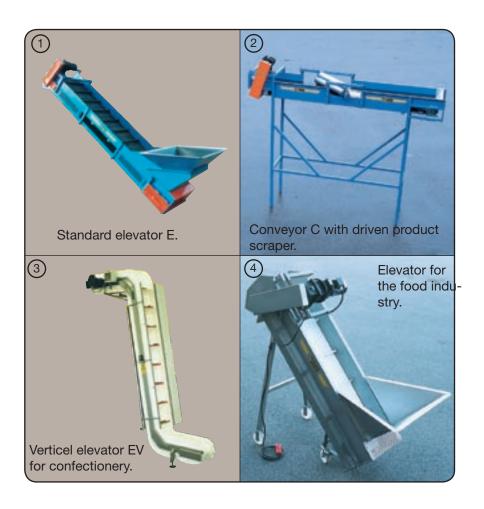


The elevator features a robust design in square steel profiles, and has a rubber conveyor belt with T-50 integral rubber carriers at distances of 300 mm centre-to-centre. The conveyor has an endless vulcanized belt. All bearings are of ball bearing type, factory lubricated and fitted with dustproof seals. The bearing rollers are made of equally robust tubular steel, with ends journalled in ball bearings

and fitted with dustproof seals. All bearings are maintenance-free. The belt is fitted with a scraper that cleans the inside of the conveyor belt and the tensioning roller. The motor is chain-driven, to simplify speed adjustment. Conveyors and elevators are available in various different lengths and widths.



Vertical elevator

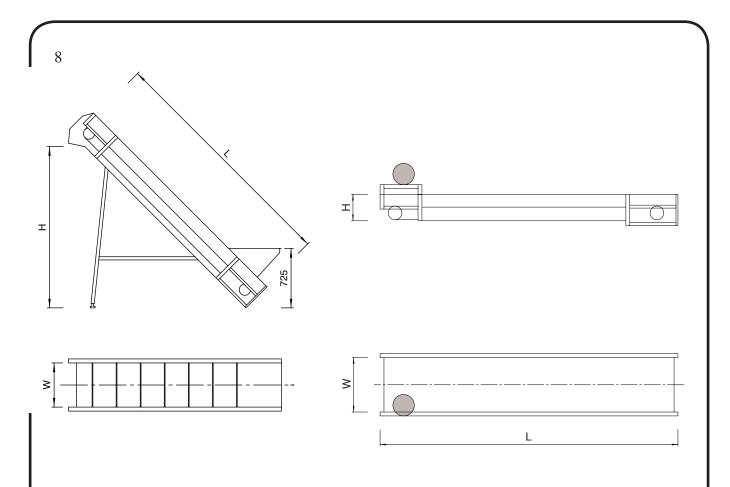

Standard widths	250, 350, 550, 800, 1000, 1200 and 1500 mm
Standard lengths	
Speed	to individual specifications
Transmission	chain drive, gear ratios to individual specifications
Drive unit	geared motor, output to individual specifications
Electrical connections	option

The elevator and conveyor is available in a large number of versions, and in different widths to customers' individual specifications. It is also available in different lengths, in steps of 100 mm.

The motor can be fitted with a va-

riator or frequency control for continuous speed adjustment. Speed can be set by remote control. The conveyor belt can be divided

into sections for use with several different product categories simultaneously. Belts are available in a

variety of versions and materials, including special versions for use in the foodstuffs industry.

Also available in a vertical version and one for product retrieval.

Electrical connection
Variator gear or frequency control
Conveyor belts in a wide range of materials
Cover on topside and/or underside
Support legs, adjustable and mobile versions
Available in stainless steel

Återförsäljare:			