

Soil Extractor SE B

For removing soil from potatoes etc before grading



Soilextractor SE B600


Soil extractors are available in six different versions, the SE B600, B800, B1200, B1600, B2000 and B2700, to meet differing capacity requirements.

The machine riddles the product on an endless belt of netting. Under the riddle is a agitator unit that loosens any objects that become stuck in the netting. The

soil removed leaves the machine via a conveyor, to prevent the grader becoming clogged.

The riddle belt is tensioned with the help of a torsioner.

The machine is fitted with a geared motor that drives the riddle and agitator unit.

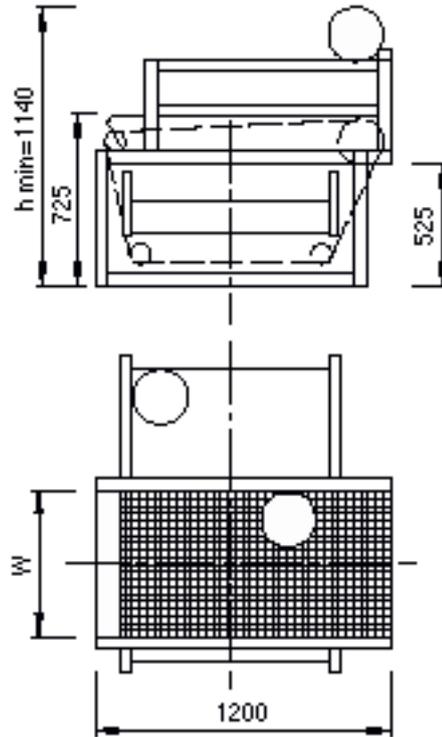

	SE B600	SE B800	SE B1200	SE B1600	SE B2000	SE B2700
Flow capacity in t/h	4-6	6-10	10-20	20-40	40-70	70-120
Belt width (W) in mm	600	800	1200	1600	2000	2700
Belt length in mm	3100	3100	3100	3100	3100	3100
Motor output in kW	0,37	0,37	0,75	1,5	1,5	2,2
Electrical connections						option

Belt netting is manufactured to customers' individual specifications. Special belts can be manufactured if required.
The soil extractor can be bypassed by fitting a belt over the riddle.

The agitator unit under the riddle comprises a series of rubber rollers that also clean the riddle. A nobby surface drive drum ensures that the belt and riddle remain clean even with products extremely soiled with

earth.
Other soil extractors with different types of discs and stars are also available.

- Variable speed
- Electrical connections
- Bypass belt
- High version leg frame and platform
- Available in stainless steel

Återförsäljare: