

Box Turner BT

For emptying 600, 800, 2.000 and 4.000 kg boxes




BT 600 box turner for emptying 600 kg boxes

The box turner is available in four different versions, BT 600, BT 800, BT 2000 and BT 4000 for emptying 600, 800, 2000 and 4000 kg boxes respectively. Operation is by means of a conveniently placed telfer handle. Boxes are emptied by turning them

through approx. 135° round their central axes. A restraining sheet reduces the risk of spillage. The BT 800, BT 2000 and BT 4000 can be modified for emptying jumbo sacks instead of boxes.



BT 800 equipped for emptying large sacks

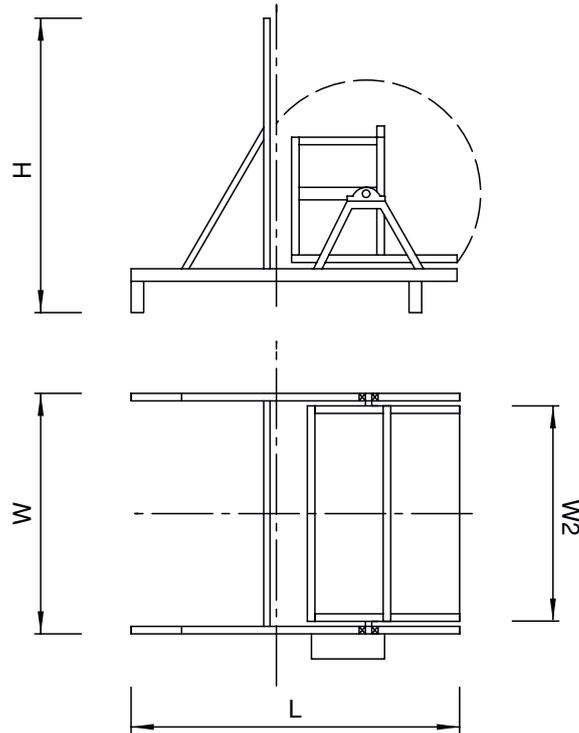

	BT 600	BT 800	BT 2000	BT 4000
Box weight	600 kg	800 kg	2000 kg	4000 kg
External length (L)	2300 mm	2500 mm	* see below	* see below
External width (W)	1650 mm	1900 mm	* see below	* see below
External height (H)	1400 mm	2350 mm	2350 mm	2350 mm
Internal width	1350 mm	1600 mm	* see below	* see below
Internal depth	1000 mm	1100 mm	* see below	* see below
Internal height, adjustable	1000–1300 mm	1000–1300 mm	* see below	* see below
Drive unit: double worm gear motor	0,75 kW	1,1 kW	2,2 kW	3,0 kW
Electrical connections	wired for 3-phase N/PE~, 230/400 V, 50 Hz, 16 A			

* to individual specifications depending on box dimensions

These box turners are designed for mounting on hoppers into which boxes are to be emptied. By positioning the box turner immediately over the hopper, optimum use can be made of hopper capacity.

Thanks to the fact that boxes are

turned about their own axes and that the worm gear motor is self-braking, boxes can be turned and stopped as required for partial emptying only.

Hydraulic box turners BT H600, BT H800 and BT H2000 are available for applications where there

is insufficient roof clearance or where trucks do not have sufficient lifting height.

Where particularly sensitive emptying is required, box turners can be fitted with continuously openable lids.

Equipment for emptying large sacks.
Traveller for filling large/multiple hoppers.
Available in stainless steel.
Also available for other box dimensions.
Special lid for gentle emptying.
Remote control.

Återförsäljare: